


URL
<https://eprel.ec.europa.eu/qr/1934643>


粘贴示意图

Paste location:

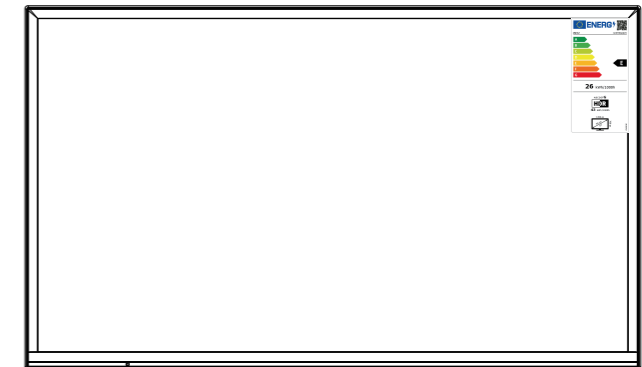

粘贴在电视机屏幕上或放置附件袋里。

Paste it on the TV screen or place the accessory bag.

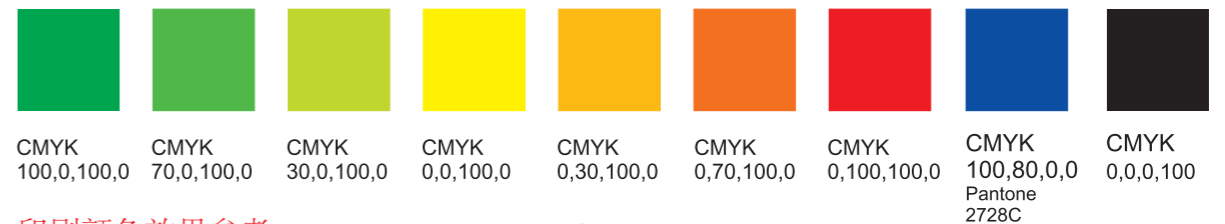


印刷颜色效果参考: N080106-001519-002!

来料方式: 单个来料。
 Incoming mode: single piece of material.

外观质量及性能要求:
 1. 尺寸正确,符合公差要求;内容颜色与设计图纸一致。
 2. 图文印刷清晰,无残缺;条码清晰可识别、可扫描,且扫描内容与图纸要求一致。
 3. 表面清洁平整、不掉色;无刮花、无破损、无气泡,边缘模切整齐。
 4. 背覆静电弱胶,移除后被贴物表面不留残胶。
 5. 酒精擦拭、附着力、常温持粘性、高温持粘性、整机性能试验需通过创维企标《平面物料材质及质量技术要求》Q/SCWB 2136要求的相关测试。
 Requirements on appearance, quality and performance:
 1.Size should be correct and conform to the tolerance requirements. Contents and colors should be consistent with the drawing.
 2.Contents should be clearly printed without defects. Bar code should be clearly recognizable and scannable, and scanned content should be the same as the drawing.
 3.The edges should be cut neatly, and the surface should be clean and smooth without fading, scratches, damages or bubbles.
 4.The back is covered with electrostatic weak glue, and no residual glue is left on the surface of the pasted object after removal.
 5.Alcohol wiping test, adhesion test, continuous viscosity test at high and room temperature, performance test must meet the requirements of enterprise standard Q/SCWB 2136.

技术要求:
 1.材质:100um PP合成纸+RP301静电胶(或同性能胶),表面覆光膜。
 2.颜色:参考实物色样N080106-001519-002。
 3.尺寸及公差:具体图纸要求。
 4.来料形式:单个来料。
 5.环保:符合RoHS、Reach和TSCA最新标准。
 Technical requirements:
 1.Material: 100um PP synthetic paper and the surface is covered with glossy protective film while the back is coated with RP301 electrostatic glue or the like.
 2.Refer to the sample N080106-001519-002 for detailed color requirements.
 3.Refer to the drawing for the detailed requirements on size and tolerance.
 4.Come in sheet form.
 5.Meet the latest standards of RoHS, Reach and TSCA.

| 深圳创维-RGB电子有限公司 SHENZHEN CHUANGWEI-RGB ELECTRONICS CO., LTD. | | | |
|--|-------------|--------------------|----------------|
| 物料名称 (TITLE) | 能效贴纸 | 品牌名称 (BRAND NAME) | METZ |
| 产品型号 (MODEL) | 7K5KG-32E3E | 销售型号 (SALES MODEL) | 32MTE6000Y |
| 视角 (PROJECTION) | | 物料编号 (PART NO.) | N080106 |
| 单位 (UNITS) | mm | 绘制/日期 (DWN./DATE) | 蔡婷 2024-03-06 |
| 比例 (SCALE) | 1:1 | 校核/日期 (CHK./DATE) | 陈军霞 2024-03-06 |
| 版本号 (VERSION NO.) | 1.0 | 批准/日期 (APP./DATE) | 李见会 2024-03-06 |

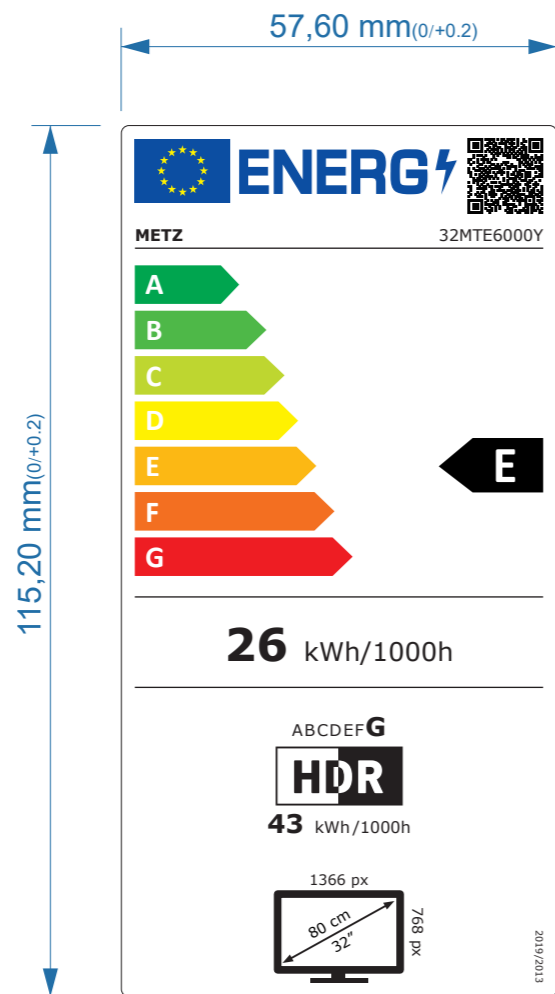

URL
<https://eprel.ec.europa.eu/qr/1934643>

粘贴示意图

Paste location:



粘贴在纸箱正面指定位置。

Paste on the designated position on the front of the carton.



| | | | | | | | | |
|---------------------|--------------------|--------------------|-------------------|--------------------|--------------------|---------------------|--|-------------------|
| CMYK 100,0,100,0 | CMYK 70,0,100,0 | CMYK 30,0,100,0 | CMYK 0,0,100,0 | CMYK 0,30,100,0 | CMYK 0,70,100,0 | CMYK 0,100,100,0 | CMYK 100,80,0,0 Pantone 2728C | CMYK 0,0,0,100 |
|---------------------|--------------------|--------------------|-------------------|--------------------|--------------------|---------------------|--|-------------------|

印刷颜色效果参考: N080106-001519-002!

来料方式: 单个来料。

Incoming mode: single piece of material.

外观质量及性能要求:

1. 尺寸正确,符合公差要求;内容颜色与设计图纸一致。
2. 图文印刷清晰,无残缺;条码清晰可识别、可扫描,且扫描内容与图纸要求一致。
3. 表面清洁平整、不掉色;无刮花、无破损、无气泡,边缘模切整齐。
4. 背覆永久性胶,覆胶均匀无气泡,覆着力强,不起翘,不易剥离。
5. 酒精擦拭、附着力、常温持粘性、高温持粘性、整机性能试验需通过创维企标《平面物料材质及质量技术要求》Q/SCWB 2136要求的相关测试。

Requirements on appearance, quality and performance:

1. Size should be correct and conform to the tolerance requirements. Contents and colors should be consistent with the drawing.
2. Contents should be clearly printed without defects. Bar code should be clearly recognizable and scannable, and scanned content should be the same as the drawing.
3. The edges should be cut neatly, and the surface should be clean and smooth without fading, scratches, damages or bubbles.
4. The back should be evenly coated with glue that is permanent, bubble free, high adhesive, non-warping and hard to peel.
5. Alcohol wiping test, adhesion test, continuous viscosity test at high and room temperature, performance test must meet the requirements of enterprise standard Q/SCWB 2136.

技术要求:

1. 材质:75um PP合成纸+永久性高粘强压敏蚀纹油胶,表面覆光膜。
2. 颜色:参考实物色样N080106-001519-002。
3. 尺寸及公差:具体图纸要求。
4. 来料形式:单个来料。
5. 环保:符合RoHS、Reach和TSCA最新标准。

Technical requirements:

1. Material: 75um PP synthetic paper and the surface is covered with glossy protective film while the back is coated with permanent, high-adhesive, pressure-sensitive and etching oil glue.
2. Refer to the sample N080106-001519-002 for detailed color requirements.
3. Refer to the drawing for the detailed requirements on size and tolerance.
4. Come in sheet form.
5. Meet the latest standards of RoHS, Reach and TSCA.

深圳创维-RGB电子有限公司

SHENZHEN CHUANGWEI-RGB ELECTRONICS CO., LTD.

| | | | |
|----------------|-------------|-------------------|----------------|
| 物料名称(TITLE) | 能效贴纸 | 品牌名称(BRAND NAME) | METZ |
| 产品型号(MODEL) | 7K5KG-32E3E | 销售型号(SALES MODEL) | 32MTE6000Y |
| 视角(PROJECTION) | | 物料编号(PART NO.) | N080106- |
| 单位(UNITS) | mm | 绘制/日期(DWN./DATE) | 蔡婷 2024-03-06 |
| 比例(SCALE) | 1:1 | 校核/日期(CIK./DATE) | 陈军霞 2024-03-06 |
| 版本号(VERSIONO.) | 1.0 | 批准/日期(APP./DATE) | 李见会 2024-03-06 |